


硬质合金型



ST16C-SLSB6-225

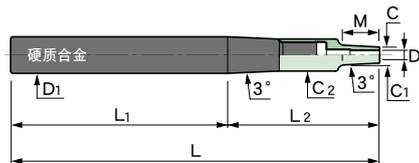

壁厚

■ 注意事项

- 刀具安装... 插入刀具时, 请务必将刀具插入比安全记号更深的位置。

型号	φD	φC	t	L	M	φD1	H	L1	L2	φC1	φC2	h		H1						
ST10C-SLSA 3-160	3	6	1.5	160	12	10	9	120	40	7.3	10	19	0.2	17						
ST16C-SLSA 3-280				280				16	182						98	0.7				
ST10C-SLSA 4-160	4	7	1.5	160	12	10	12	120	40	8.3	10	19	0.2	17						
ST16C-SLSA 4-280				280				16	182						98	0.7				
ST12C-SLSB 6-175	6	10	2	175	19.1	12	18	125	50	—	12	27	0.3	25						
ST16C-SLSB 6-225				225	22			16	165						60	12.3	16	32	0.6	28
ST20C-SLSB 6-320				320	20			20	221						99	20	38	2.2	33	
ST25C-SLSB 6-360				360	25			25	242						118					
ST16C-SLSB 8-225	8	13	2.5	225	22	16	24	165	60	15.3	16	32	0.6	28						
ST20C-SLSB 8-270				270				20	200			70	20	38	1.1	33				
ST25C-SLSB 8-360				360				25	242			118	2.2	33						
ST20C-SLSB10-270	10	16	3	270	22	20	30	200	70	18.3	20	38	1.1	33						
ST25C-SLSB10-360				360									25		242	118	2.2			

硬质合金直柄延长杆部件型号表

组合型号	硬质合金柄型号	柄头型号
ST10C-SLSA 3-160	ST10C-7-120	SH 7-SLSA 3-40
-SLSA 4-160		-SLSA 4-40
ST12C-SLSB 6-175	ST12C-9-125	SH 9-SLSB 6-50
ST16C-SLSA 3-280	ST16C-7-240	SH 7-SLSA 3-40
-SLSA 4-280		-SLSA 4-40
-SLSB 6-225		SH12.5-SLSB 6-60
-SLSB 8-225		SH12.5-SLSB 8-60
ST20C-SLSB 6-320	ST20C-12.5-260	SH12.5-SLSB 6-60
-SLSB 8-270	-16-200	SH16-SLSB 8-70
-SLSB10-270		SH16-SLSB10-70
ST25C-SLSB 6-360	ST25C-16-290	SH16-SLSB 6-70
-SLSB 8-360		-SLSB 8-70
-SLSB10-360		-SLSB10-70

